



Uncover  
the Spectrum  
of Style

6H ANTI  
SCRATCH | 100% PURE  
ACRYLIC

1131 956 1311  
Est. 1961

An abstract geometric artwork featuring sharp, angular shapes in deep blue, purple, and black. A bright, glowing orange and yellow light source creates a strong beam of light that reflects off the surfaces, creating a sense of depth and movement. The overall composition is dynamic and modern.

Color Your  
*Imagination*



## From Vision to Reality

Pioneers in delivering high-quality acrylic laminates that transform everyday spaces into works of art. With years of expertise in the industry, we specialize in crafting premium acrylic surfaces known for their exceptional gloss, durability and aesthetic appeal.

We offer a wide range of acrylic laminates in diverse finishes, colors and patterns to cater to the evolving needs of modern interiors. Whether it's for residential, commercial or industrial spaces, our laminates provide the perfect balance of functionality and design.

We are dedicated to using eco-friendly materials and practices to ensure that our products not only enhance interiors but also contribute to a greener future. Our focus on quality, customer satisfaction, and design excellence has made us a trusted name in the acrylic laminate industry.

Join us in elevating spaces with the brilliance of acrylic!



SUSTAINABILITY WITH STYLE

Shine and Strength, The Acrylic Way



ANTI SCRATCH



LIGHT WEIGHT



VERTICAL APPLICATION



TERMITE & BORER  
FREE



1.5MM THICKNESS



WIDE RANGE



ANTI BACTERIAL



WATER PROOF

SHOWCASE YOUR PRODUCTS



FURNITURE



KITCHEN



BATHROOM



RESTAURANT



HOTEL



COMMERCIAL



INSTITUTE



HOSPITAL



Ultimate in Elegance and Durability

Discover our **Full Body** laminates fusion of style and strength in every surface, delivering seamless beauty from edge to edge.



6H ANTI SCRATCH | 100% PURE ACRYLIC


EXCLUSIVE

*Simplify with Style*


Sleek and Cohesive Look



Acry touch  
WE BUILD YOUR IMAGINE




AT - 5031



AT - 5033



AT - 5037




AT - 5032

01  
02






 **EXCLUSIVE**



AT - 5035



AT - 5034




AT - 5036

*Acry* **touch**  
WE BUILD YOUR IMAGINE

*Embrace Your Kaleidoscope*

Unleash the beauty of your unique colors

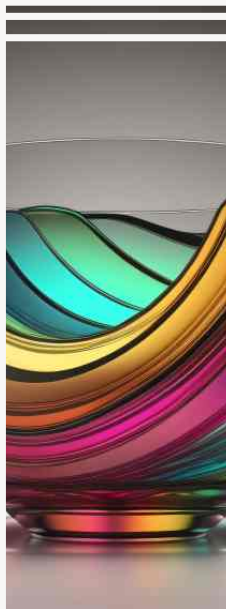


6H ANTI SCRATCH | 100% PURE ACRYLIC




6H<sup>ANTI</sup> SCRATCH | 100%<sup>PURE</sup> ACRYLIC

 PREMIUM


*Refresh with Calm*  
Sense of Peace and Tranquillity

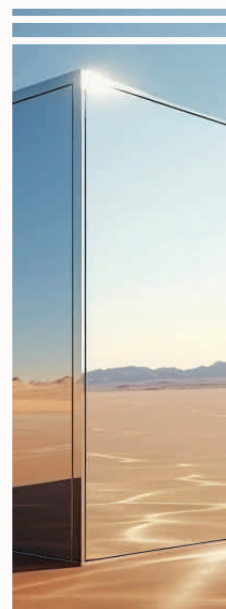

*Acry touch*  
WE BUILD YOUR IMAGINE



AT - 5005



AT - 5010



AT - 5009




AT - 5014


05  
06









AT - 5011



AT - 5027



AT - 5030



AT - 5021

*Luxurious Brilliance*

Perfect for Making a Statement



6H ANTI SCRATCH | 100% PURE ACRYLIC







6H<sup>ANTI</sup> | 100%<sup>PURE</sup>  
SCRATCH | ACRYLIC

 PREMIUM


*Acry* touch  
WE BUILD YOUR IMAGINE




AT - 5026



AT - 5029




AT - 5020



AT - 5019




AT - 5017




AT - 5018








AT - 5004




AT - 5003



AT - 5023



AT - 5022



AT - 5006



AT - 5012





6H<sup>ANTI</sup> SCRATCH | 100%<sup>PURE</sup> ACRYLIC

 PREMIUM

*Timeless and Versatile*

Balanced and Classic Look with Neutral Shades



*Acry touch*  
WE BUILD YOUR IMAGINE



AT - 5028



AT - 5016



AT - 5024



AT - 5025

13  
14






SOLID COLOR




# Symphony of Colors


Vibrant Choices  
for Every Mood



AT - 5001




AT - 5015



AT - 5002



AT - 5007



AT - 5008



6H ANTI SCRATCH | 100% PURE ACRYLIC

TECHNICAL SPECIFICATION

Parameter	Acry Touch	High Gloss Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	> 90	> 70	85	85
Scratch Proof	Scratch resistance	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resitance	Excellent	Bad	Bad	Excellent
Dry Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

HOW TO CARE

- Cleaning should be done with water and clean, non-abrasive cloth.
- Gloss surface are recommended only for vertical application.
- Do not use the Acrylic for purposes that it is not intended for (e.g. Do not iron chop, hammer or expose the Acrylic to open flame).
- Avoid the use of abrasive liquid cleanser's, bleaching compounds or solutions as These may damage the surface of the Acrylic.
- Peel off the protective film after processing.
- Have a thickness balance of +\ -15%.

DO'S & DON'TS


- Store the laminates below 30°C temperature. To avoid the inside cracks & stretch line, do not store acrylic sheet in roll form.
- Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft Micro fibre cloth.
- Glossy surfaces recommended to use in vertical applications.
- Do not use alcohol based cleaners, solvent, petrol or oil as these may damage the surface of the laminate. Do not use cloth other than micro fibre.
- Do not use thinner on the surface of Other laminates.
- Do not place hot cookware directly on the laminate as the exposure to temperatures above 30°C may cause damage to the laminate surface.
- Outdoor application of the laminate with exposure to direct sunlight and weather conditions area strict not recommended. UV rays may de-shape the laminate.

**Note :** There can be colour variation in material from different batches. it is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.



REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS

To avoid de lamination / air bubbles in between ply and laminate the above steps should be Taken care of Bonding of acrylic sheets shouldn't be completed under high humidity.



Acrylic are bonded in extremely Humid conditions.



Debonding in certain area because of uneven subtract surface.



When substrate loses Moisture After installation.



Use of extremely large acrylic sheets (more than 8 ft 2 ft long)



Insufficient or lack of pressing During the period of acrylic



Use of synthetic resin adhesive any other the peva (polyethylene vinyl acetate co-polymer)

LIMITED WARRANTY

Acry Touch products are tested to be reasonably free of defects, and when used and fabricated properly They will comply with the applicable manufacturing specifications within realistic deviations. We recommend customers to insect properly before installing

Acry Touch warranty in on way covers defects and non-compliance or otherwise attributable to any other causes, including without limitation the following:

- Improper handling/transportation/storage of Acry Touch
- There will be no guarantee or exchange under any circumstances
- Color variations in products from Acry Touch batches are possible
- Improper or unintended usage of Acry Touch
- We recommend using products from same batch to avoid color variations
- Lack of or improper maintenance of Acry Touch
- This brochure is for presentation purpose only
- Exposure to high temperatures
- Unauthorized alteration to the products
- Expos ure to direct sunlight can gravely affect a Acrylic 's appearance
- Use interior or sub-standard Dipped Plywood or Dipped Lipping Patti, which may Chemically react the adhesive.
- The use of synthetic rubber adhesives such as SR/Jat Pat, Bostic, Heatex, etc
- Prolonged exposure to high temperature (above 30°C-35°C)
- If hot cookware or utensils are directly placed on the Acrylic
- To avoid the inside cracks stretch line, do not store acrylic sheet in roll form

